
Expand your comfort zone



## 878 SilverScreen Originals

Non Transparent Metallised

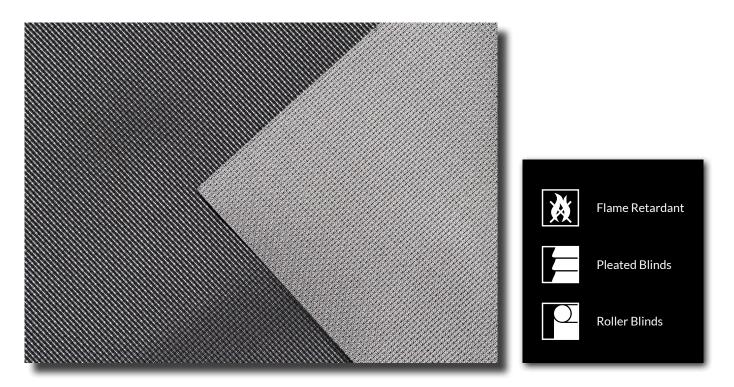

## Superior heat and light control available in 4 transparencies

### **Features**

- Part of the Verosol Core Collection metallised fabrics developed in Europe, to the highest quality standard
- Offering high performance, independent of colour
- Superior heat and glare control, excellent energy efficient solution
- Woven from 100% Polyester Trevira CS and is inherently flame retardant
- Greenguard Green, Global GreenTagCert™ Gold GreenRate Level A and Oeko-Tex certified
- The Originals Collection features 13 Core colours and 23 Indent colours, available in 4 different transparencies
- Suitable for Pleated Blinds and Roller Blinds

### **Care Instructions**

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuumclean with a soft brush in a low setting.

For more information or to create your specification visit verosolspecifications.com.au or call 1800 721 404



# **878 SilverScreen Originals**

Non Transparent Metallised

Fabric Density	Non Transparent				Anti-Static Yes								
Composition	100% Polyester	1	PVC f	ree	Phthalate	free	Formalde	ehyde free	Н	alogen fre	e Ar	ntimicrobia	l free
Weight	142gsm ± 5%												
Thickness	0.23mm ± 5%												
Width	2400mm ± 50n	۱m											
Colour Fastness	>5 [ISO 105-B02	]											
Flame Retardancy	Ignitability Inde	×	0 Ra	nge [0-	-20]				• • • • • • • • •				
[AS/NZS 1530.3-1999]	Spread of flame			nge [0-	-10]								
	Heat evolved In			nge [0-	-10]				•••••				
	Smoke develop	ed Index	2 Ra	nge [0-	-10]	• • • • • • • • •			• • • • • • • • •				
[AS/NZS 3837-1998]	Classification G			••••					•••••		•••••		• • • • • • • • • • •
[International]	DIN 4102 B1 (D)		(UK)   NF	PA 701	I (USA)		•••••		• • • • • • • • • •		•••••		
Aluminium Adhesion	ISO 2409 Classif	fication 0	••••••		• • • • • • • • • • • •	• • • • • • • •	IR Emissivi	ty Metal S	ide <mark>0</mark>	.27	•••••	•••••	• • • • • • • • • • •
Corrosion Resistance	Metal layer EN I	SO 3231							•••••		•••••		
Certification	Greenguard Go			Tag Go			Oeko-Tex <sup>2</sup>			SO 9001:20 <sup>°</sup>	15		
	ISO 14001:2015	•••••	REAC		•••••	• • • • • • • • •	RoHS2	• • • • • • • • • • • •		PD 2.1	•••••		• • • • • • • • • • •
Suitable Products	Roller Blinds		Pleate	ted Blinds					•••••		•••••		• • • • • • • • • • •
Fabric colour code		0105	0744	0744		0292	0765				0936	0998	
•••••••••••••••••••••••••••••••••••••••	0000		0741	<b>0711</b>	<b>0221</b> 3%	3%		0778	0790	0920	•••••	•••••	0829
Solar transmittance	3%	3%	3%		•••••	•••••	2%	2%	2%	2%	2%	2%	2%
Solar reflectance outside	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%
Solar absorptance	29%	29%	29%	.29%	29%	29%	30%	30%	30%	30%	30%	30%	30%
Luminous transmittance [VLT]	3%	2%	2%		2%	2%	1%	1%	0.6%	0.3%	1%	0.5%	0.2%
UV transmittance	1%	1%	1%	1%	1%	1%	1%	1%	0%	0%	0%	0%	0%

Openness factor (nominal)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Ra (colour rendering index)	99	95	92	92	94	94	78	75	70	98	93	70	70

#### Glazing Type - Single 4mm Clear Glass

Visible light transmittance	3%					
G-value / Solar heat gain coefficient	24%					
Shading coefficient	28%					
U-value (W/m²K)	2.0					
Glazing Type - High Performance Glazing						

Visible light transmittance	2%
G-value / Solar heat gain coefficient	17%
Shading coefficient	20%
U-value (W/m²K)	0.8

#### . . -

Colour Range							
0000 Soft Grey	0105 Slate	0741 Parchment	0711 Almond	0221 Champagne	0292 Blonde	0765 Gravel	0778 Cafe
0790 Espresso	0920 Pewter	0936 Dark Grey	0998 Anthractie	0829 Onyx			

© Copyright 2017 Verosol Australia [ABN 36 006 221 003] Updated March 2020 Information supplied was current at time of printing. Please refer to Warranty Terms & Conditions at www.verosol.com.au for more information. All presented data calculated in WIS 3.0.1 (Advanced Windows Information System) with spectral data. Specifications and other data are based on information available at the time of preparation of this document and are subject to production tolerances and/or change without prior notice. Flame retardancy information is sourced from AWTA testing results [ASNX25 1530.3:1999]. Please note that test results may vary slightly depending on fabric colour. (Amm Single Glass reference glazing A EN 14501], [High Performance Glazing reference glazing D EN 14501] according to EN 14500. Note: All colours are a representative only, please request an A4 sample for accurate colour representation at www.verosol.com.au.