


Casa

Sheer Curtain Fabric

Opulent Living

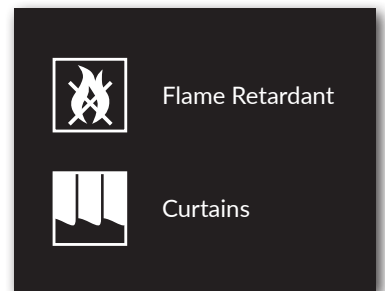

Designer: Christian Zuzunaga

Luxury designer decorative sheer curtain fabric

Features

- Part of the Verosol Opulent Living Collection - Drapery fabrics developed to the highest quality standards
- Casa is a plain woven sheer with shiny melange yarns offering exceptional colour depth
- Casa features bright specs of colour, such as blue, green or pink, which are intermingled with understated neutral tones, resulting in a unicoloured appearance from a distance but up-close reveals a rich yet delicate colours
- Woven from 100% Trevira CS, Casa ensures soft drapability and easy care
- Casa is inherently flame retardant making it ideal for both residential and commercial applications
- Casa was designed by acclaimed Barcelona based designer Christian Zuzunaga

Cleaning and care

- 60 Wash at max. 60°C, mild process, drip dry
- Do not bleach
- Do not tumble dry
- Iron at medium temperature (max. 150°C)
- P Professional dry cleaning with tetrachloroethylene, normal process

For more information visit verosol.com.au or call **1800 721 404**



Green Building
Council Australia
Member 2020-2021

Casa

Sheer Curtain Fabric

| | | | | |
|--|--|------------------------------|--------------------------------------|--------------------------|
| Fabric Density | Sheer | Weighted Hem - NO | | |
| Composition | 100% Trevira CS | Formaldehyde free | | |
| Weight | 510g/lin mtr | | | |
| Width | 3000mm | Continuous | Nominal roll size | 35 lineal metres |
| Pattern | Solid | | | |
| Yarn type | Filament | | | |
| Binding | Plain | | | |
| Colour Fastness | Light [ISO 105-B02] 6 - 7 | | | |
| Possible Shrinkage | 1% | | | |
| Flame Retardancy [AS/NZS 1530.3-1999] | Ignitability Index | 0 | Range [0-20] | |
| | Spread of flame Index | 0 | Range [0-10] | |
| | Heat evolved Index | 0-1 | Range [0-10] | |
| | Smoke developed Index | 0 | Range [0-10] | |
| [International Standards] | BS 5867 Part 2 Type B | DIN 4102 B1 NF P 92 507 M1 | EN 13 773 class 1 UNI 9177 Class 1 | IMO FTP Code 2010:Part 7 |
| Certification | Greenguard | EPD to EN15804 | HPD 2.1 | REACH |
| Airflow Resistance [EN 29053] | Airflow Resistance of $R_s = 589$ Pa s/m | | | |
| Sound Absorption [EN ISO 354] | Report available upon request | | | |
| Designer | Christian Zuzunaga | | | |
| Manufactured in | Netherlands | | | |
| Cleaning | | | | |
| Suitable Products | Curtains | | | |

Colour Range



Care: