
## **Verosol**

# **Zulu 2**Sheer Curtain Fabric

### Opulent Living





Designer: Giulio Ridolfo

### Luxury designer decorative sheer curtain fabric

#### **Features**

- · Part of the Verosol Opulent Living Collection Drapery fabrics developed to the highest quality standards
- Zulu 2 is a light, transparent curtain fabric that consistently reveals surprising nuances as the light changes.
- Whilst Zulu 2 looks delicate, it is a robust fabric. Woven with an open leno-binding which creates a pronounced texture using fine shiny yarns that change the colour intensity of the drapery due to its open weave & transparency
- Woven from 100% Trevira CS, Zulu 2 ensures soft drapability and easy care
- Zulu 2 is inherently flame retardant making it ideal for both residential and commercial applications
- Zulu 2 was designed by Italian "colour master" Giulio Ridolfo

#### **Cleaning and care**

\40\ Wash at max. 40°C, mild process, drip dry

Do not bleach

Do not tumble dry

Iron at medium temperature (max. 150°C)

(P) Professional dry cleaning with tetrachloroethylene, normal process

For more information visit verosol.com.au or call 1800 721 404








### Zulu 2

### Sheer Curtain Fabric

Fabric Density	Sheer	Weighted Hem - NO		
Composition	100% Trevira CS	Formaldehyde free	Formaldehyde free	•••••••••••••••••••••••••••••••••••••••
Weight	300g/lin mtr		••••••	••••••
Width	3000mm	Continuous	Nominal roll size	35 linneal metres
Pattern	Solid			
Yarn type	Filament	•••••		••••••
Binding	Leno	• • • • • • • • • • • • • • • • • • • •		•••••
Colour Fastness	Light [ISO 105-B02] 7			
Possible Shrinkage	1%			
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0 Range [0-20]		
[A3/1423 1330.3-1333]	Spread of flame Index	0 Range [0-10]	•	
	Heat evolved Index	0-1 Range [0-10]		
	Smoke developed Index	0 Range [0-10]		
[International Standards]	BS 5867 Part 2 Type B	DIN 4102 B1   NF P 92 507 M1	EN 13 773 class 1   UNI 9177 Class 1	IMO FTP Code 2010:Part 7
Certification	Greenguard	EPD to EN15804	HPD 2.1	REACH
Aiflow Resistance [EN 29053]	Airflow Resistance of $R_s = 3 \text{ Pa s/m}$			
Designer	Giulio Ridolfo			•
Manufactured in	Netherlands			
Cleaning	\ <u>40</u> / 🂢 🔯 🗃 🕑		••••••	•••••••••••••••••••••••••••••••••••••••
Suitable Products	Curtains			•••••

**Colour Range** 

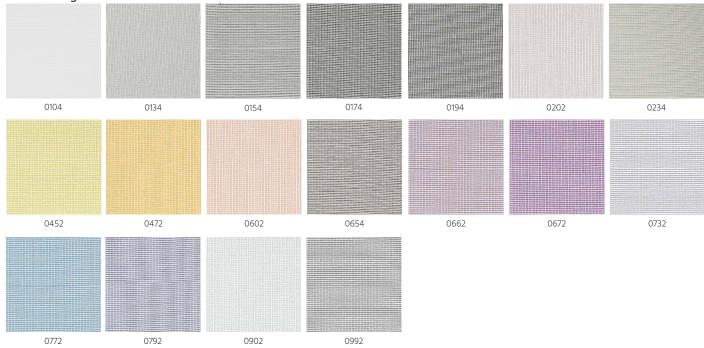

Care: \40/ \ \ □ \ □ \ □