


878 SilverScreen Originals

Non Transparent Metallised



Flame Retardant

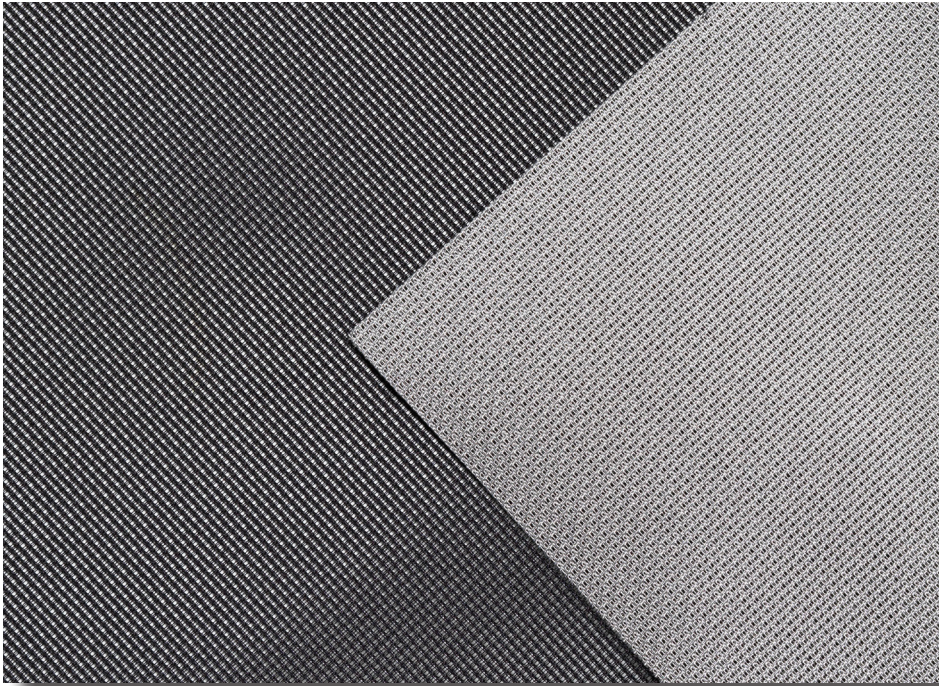

Pleated Blinds



Roller Blinds

Superior heat and light control available in 4 transparencies

Features

- Part of the Verosol Core Collection - metallised fabrics developed in Europe, to the highest quality standard
- Offering high performance, independent of colour
- Superior heat and glare control, excellent energy efficient solution
- Woven from 100% Polyester Trevira CS and is inherently flame retardant
- Greenguard Gold, Global GreenTagCert™ GreenRate | Level A and Oeko-Tex certified
- The Originals Collection features 13 Core colours and 23 Indent colours, available in 4 different transparencies
- Suitable for Pleated Blinds and Roller Blinds

Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information or to create your next specification visit verosol specifications.com.au or call **1800 721 404**



878 SilverScreen Originals

Non Transparent Metallised

Fabric Density	Non Transparent			Anti-Static		Yes	
Composition	100% Polyester Trevira CS	PVC free	Phthalate free	Formaldehyde free	Halogen free	Antimicrobial free	
Weight	142gsm ± 5%						
Thickness	0.23mm ± 5%						
Width	2400mm ± 50mm						
Colour Fastness	>5 [ISO 105-B02]						
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0 Range [0-20]					
	Spread of flame Index	0 Range [0-10]					
	Heat evolved Index	0 Range [0-10]					
	Smoke developed Index	2 Range [0-10]					
[AS/NZS 3837-1998]	Classification Group 1						
[International]	DIN 4102 B1 (D) BS5867-2 (UK) NFPA 701 (USA)						
Aluminium Adhesion	ISO 2409 Classification 0			IR Emissivity Metal Side		0.27	
Corrosion Resistance	Metal layer EN ISO 3231						
Certification	Greenguard Gold	GreenRate Level A		Oeko-Tex 100 Class IV		ISO 9001:2015	
	ISO 14001:2015	REACH		RoHS2		HPD 2.1	
Suitable Products	Roller Blinds			Pleated Blinds			

Fabric colour code	0000	0105	0741	0711	0221	0292	0765	0778	0790	0920	0936	0998	0829
Solar transmittance	3%	3%	3%	3%	3%	3%	2%	2%	2%	2%	2%	2%	2%
Solar reflectance outside	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%	68%
Solar absorptance	29%	29%	29%	29%	29%	29%	30%	30%	30%	30%	30%	30%	30%
Luminous transmittance [VLT]	3%	2%	2%	3%	2%	2%	1%	1%	0.6%	0.3%	1%	0.5%	0.2%
UV transmittance	1%	1%	1%	1%	1%	1%	1%	1%	0%	0%	0%	0%	0%
Openness factor (nominal)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Ra (colour rendering index)	99	95	92	92	94	94	78	75	70	98	93	70	70

Glazing Type - Single 4mm Clear Glass

Visible light transmittance	3%
G-value / Solar heat gain coefficient	24%
Shading coefficient	28%
U-value (W/m²K)	2.0

Glazing Type - High Performance Glazing

Visible light transmittance	2%
G-value / Solar heat gain coefficient	17%
Shading coefficient	20%
U-value (W/m²K)	0.8

Colour Range

