

# Verosol

## 982 SilverScreen Originals

**Blockout Metallised** 

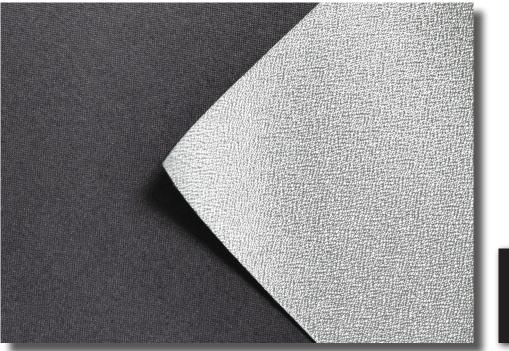



### Superior heat and light control available in 4 transparencies

### **Features**

- Part of the Verosol Core Collection metallised fabrics developed in Europe, to the highest quality standard
- Designed for maximum room darkening and total privacy
- Use in combination with SilverScreen Originals fabrics in twin pleated blinds to ensure both daytime & nightime privacy
- Oeko-Tex certified, Phthalate & Halogen free
- Suitable for Pleated Blinds

### **Care Instructions**

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information or to create your next specification visit verosolspecifications.com.au or call 1800 721 404



# 982 SilverScreen Originals

**Blockout Metallised** 

Fabric Density	Blockout			Anti-Static	Yes	
Composition	100% Polyester   PVC free	Phthalate fre	e Halogen Free	Formaldehyde free	Antimicrobial free	
Weight	270gsm ± 5%					• • • • • • • • • • • • • • • • •
Thickness	0.34mm ± 5%					• • • • • • • • • • • • • • • •
Width	2200mm ± 50mm					
Colour Fastness	>5 [ISO 105-B02] Metal 8					
Flame Retardancy	Non Fire Retardant	••••••				• • • • • • • • • • • • • • • • •
Aluminium Adhesion	ISO 2409 Classification 0	••••••				• • • • • • • • • • • • • • • • • • • •
Corrosion Resistance	Metal layer EN ISO 3231	••••••				• • • • • • • • • • • • • • • •
Certification	Oeko-Tex 100 Class IV	REACH	RoHS	ISO 9001:2015	ISO 14001:2015	
Suitable Products	Pleated Blinds	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •		•••••	
•••••	•••••••••••••••••••••••••••••••••••••••	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	•••••	• • • • • • • • • • • • • • • •

Fabric colour code	0000
Solar transmittance	0%
Solar reflectance outside	65%
Solar absorptance	35%
Luminous transmittance [VLT]	0%
UV transmittance	0%
Openness factor (nominal)	0%

#### Glazing Type - Single 4mm Clear Glass

Visible light transmittance	0%			
G-value / Solar heat gain coefficient	24%			
Shading coefficient	28%			
U-value (W/m²K)	2.0			
Glazing Type - High Performance Glazing				
Glazing Type - Ingli Ferrormance Gla	azing			
Visible light transmittance	0%			
Visible light transmittance	0%			

#### **Available Colours**

0000 Ash White	
0000 Ash White	0829 Onyx

© Copyright 2018 Verosol Australia [ABN 36 006 221 003] Information supplied was current at time of printing. Please refer to Warranty Terms & Conditions at www.verosol.com.au for more information. All presented data calculated in WIS 3.0.1 (Advanced Windows Information System) with spectral data. Specifications and other data are based on information available at the time of preparation of this document and are subject to production tolerances and/or change without prior notice. Flame retardancy information is sourced from MVTA testing results [AS/NZS 153.03.1'999]. Please note that test results may vary slightly depending on fabric colour. [Hum Single Glass reference glazing A EN 14501]. [High Performance Glazing reference glazing EN 14501] according to EN 14500. Note: All colours are representative only, please request an A4 sample for accurate colour representation at www.verosol.com.au.