


## 202 SilverScreen Performance 2%

Semi Transparent Metallised



Flame Retardant

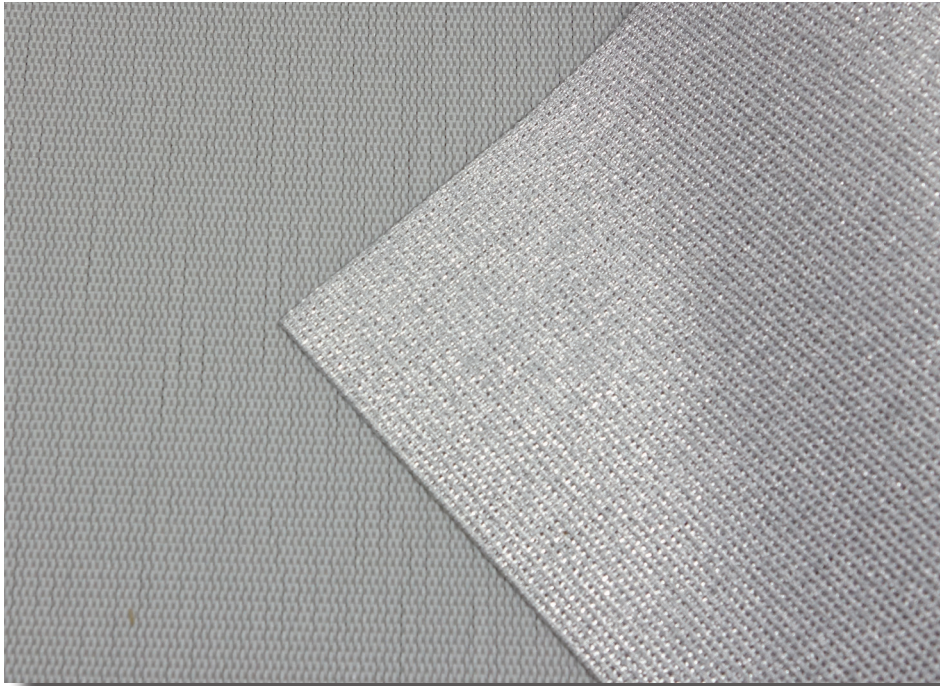

Roller Blinds



Roman Blinds



Panel Glides

*The ultimate low-E solution for solar protection and light control*

### Features

- Part of the Verosol Core Collection - metallised fabrics developed in Europe, to the highest quality standard
- Provides excellent vision out, and dramatically reduces heat and glare at the window independent of colour
- Excellent energy efficient solution, offering an unparalleled solar reflectance of 85%
- Lowest-E fabric providing excellent insulative properties
- Constructed from a hard wearing PVC coated fibreglass yarn and is inherently flame retardant
- Greenguard Gold, Global GreenTag EPD, Global Green Tag & VCA BEP PVC - Best Environmental Practice PVC
- Suitable for Roller Blinds, Roman Blinds and Panel Glides

### Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information or to create your next specification visit [verosol specifications.com.au](https://verosol specifications.com.au) or call **1800 721 404**



Member 2023-2024

# 202 SilverScreen Performance 2%

## Semi Transparent Metallised

|  |   |                                 |                |               |         |
|--|---|---------------------------------|----------------|---------------|---------|
| Fabric Density                           | Semi Transparent  |                                 | Pattern        | Natté 1x2     |         |
| Composition                              | 64% PVC / 36% Fibreglass                                      | Formaldehyde Free               | Anti-Static    | Yes           |         |
| Weight                                   | 400gsm ± 5%   |                                 |                |               |         |
| Thickness                                | 0.46mm ± 5%   |                                 |                |               |         |
| Width                                    | 2800mm ± 50mm   |                                 |                |               |         |
| Colour Fastness                          | 7 - 8 [ISO 105-B02]   |                                 |                |               |         |
| Flame Retardancy<br>[AS/NZS 1530.3-1999] | Ignitability index  | 0                               | Range [0-20]   |               |         |
|  | Spread of flame index   | 0                               | Range [0-10]   |               |         |
|  | Heat evolved index  | 0                               | Range [0-10]   |               |         |
|  | Smoke developed index   | 4                               | Range [0-10]   |               |         |
| [AS/NZS 3837-1998]                       | Classification Group 2  |                                 |                |               |         |
| [International]                          | NFP 92503 Specification M1   BS 5867 Part 2 Type B   NFPA 701 |                                 |                |               |         |
| Aluminium Adhesion                       | ISO 2409 Classification 0                                     |                                 |                |               |         |
| Certification                            | Greenguard Gold   | Best Environmental Practice PVC | ISO 14001:2015 | ISO 9001:2015 |         |
|  | Formaldehyde Free   | Global GreenTag EPD             | REACH          | RoHS2         | HPD 2.1 |
| Suitable Products                        | Roller Blinds   | Roman Blinds                    | Panel Glides   |               |         |

| Fabric colour code               | 0010  | 0020  | 0030  | 0060  | 0040  | 0050  |
|----------------------------------|-------|-------|-------|-------|-------|-------|
| Solar transmittance              | 3%    | 3%    | 3%    | 3%    | 3%    | 2%    |
| Solar reflectance outside        | 85%   | 85%   | 85%   | 85%   | 85%   | 85%   |
| Solar absorptance                | 12%   | 12%   | 12%   | 12%   | 12%   | 13%   |
| Luminous transmittance [VLT]     | 3%    | 3%    | 3%    | 3%    | 3%    | 2%    |
| UV transmittance                 | 3%    | 3%    | 3%    | 3%    | 3%    | 2%    |
| IR emissivity metal side [low-E] | 0.03  | 0.03  | 0.03  | 0.03  | 0.03  | 0.03  |
| IR emisivity colour side         | 0.878 | 0.878 | 0.878 | 0.878 | 0.878 | 0.878 |
| Openness factor (nominal)        | 2%    | 2%    | 2%    | 2%    | 2%    | 2%    |

### Glazing Type - Single 4mm Clear Glass

|                                       |     |     |     |     |     |     |
|---------------------------------------|-----|-----|-----|-----|-----|-----|
| Visible light transmittance           | 4%  | 3%  | 3%  | 3%  | 3%  | 3%  |
| G-value / Solar heat gain coefficient | 15% | 15% | 15% | 16% | 15% | 16% |
| Shading coefficient                   | 17% | 17% | 17% | 18% | 18% | 18% |
| U-value (W/m²K)                       | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 |

### Glazing Type - High Performance Glazing

|                                       |       |     |     |     |     |     |
|---------------------------------------|-------|-----|-----|-----|-----|-----|
| Visible light transmittance           | 3%    | 2%  | 2%  | 3%  | 2%  | 2%  |
| G-value / Solar heat gain coefficient | 11.6% | 12% | 12% | 12% | 12% | 12% |
| Shading coefficient                   | 13%   | 14% | 13% | 14% | 14% | 14% |
| U-value (W/m²K)                       | 0.7   | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 |

### Colour Range

