


## 803 EnviroScreen

Semi Transparent Non Metallised



Flame Retardant

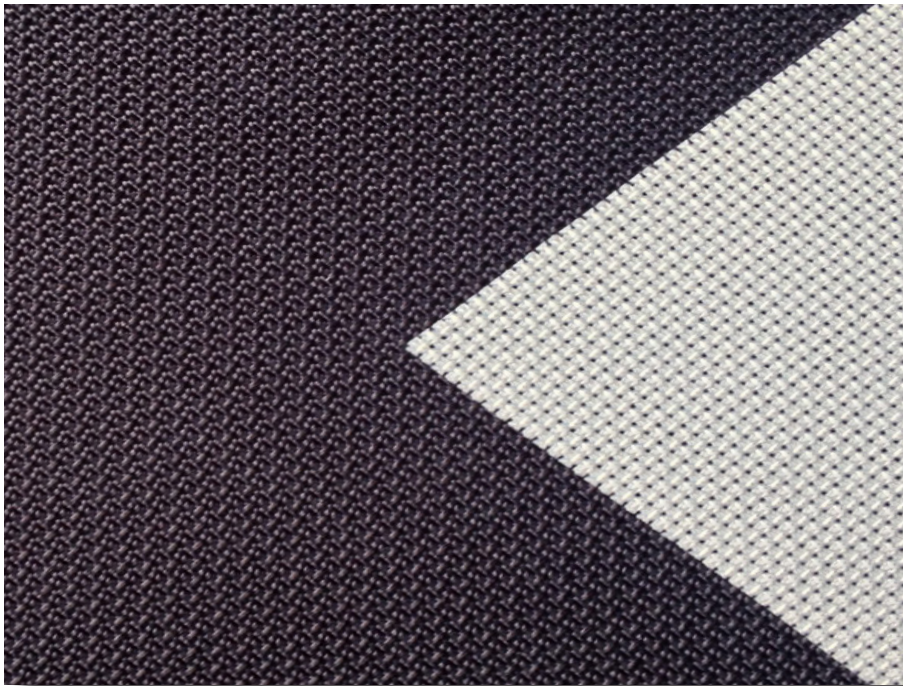

Roller Blinds

*Great visual and thermal comfort*

### Features

- Part of the Verosol Indent Collection - developed in Europe, to the highest quality standard
- Woven screen-like construction, with a clear textile appearance and soft grey coloured backing
- PVC free and formaldehyde free; Inherently flame retardant polyester
- Cradle to Cradle Bronze, Greenguard Gold, Global GreenTag EPD, GreenRate Level A, LCARate GOLD & Oeko-Tex certified
- Suitable for Roller Blinds

### Care Instructions

For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

For more information or to create your next specification visit [verosol specifications.com.au](https://verosol specifications.com.au) or call 1800 721 404



# 803 EnviroScreen

## Semi Transparent Non Metallised

Fabric Density	Semi Transparent					
Composition	100% PES, Inherent FR	PVC free	Phthalate Free	Formaldehyde Free	Halogen Free	Antimicrobial Free
Weight	220gsm ± 5%					
Thickness	0.55mm ± 5%					
Width	2400mm ± 50mm					
Colour Fastness	< 5					
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0 Range [0-20]				
	Spread of flame Index	0 Range [0-10]				
	Heat evolved Index	0 Range [0-10]				
	Smoke developed Index	1 Range [0-10]				
Certification	Cradle to Cradle Bronze	Greenguard Gold	GreenRate   Level A	ISO 9001:2015	ISO 14001:2015	
	Oeko-Tex 100 Class IV	GreenTag EPD	GreenTag LCARate GOLD	REACH	RoHS2	HPD 2.1
Suitable Products	Roller Blinds					

Fabric colour code	0000	0765	0936	0998	0829
Solar transmittance	35%	31%	29%	25%	23%
Solar reflectance outside	53%	53%	51%	50%	49%
Solar absorptance	12%	16%	20%	25%	28%
Luminous transmittance [VLT]	35%	27%	20%	11%	7%
UV transmittance	8%	6%	6%	5%	4%
Openness factor (nominal)	3%	3%	3%	3%	3%

### Glazing Type - Single 4mm Clear Glass

Visible light transmittance	35%	26%	20%	11%	7%
G-value / Solar heat gain coefficient	40%	39%	39%	38%	38%
Shading coefficient	46%	45%	45%	44%	44%
U-value (W/m <sup>2</sup> K)	2,7	2,7	2,7	2,7	2,7

### Glazing Type - High Performance Glazing

Visible light transmittance	25%	19%	15%	8%	5%
G-value / Solar heat gain coefficient	22%	22%	22%	22%	22%
Shading coefficient	25%	23%	25%	25%	25%
U-value (W/m <sup>2</sup> K)	0,9	0,9	0,9	0,9	0,9

### Colour Range

