


## 882 SilverScreen Originals *SilverScreen Living*

Semi Transparent Metallised Curtain Fabric

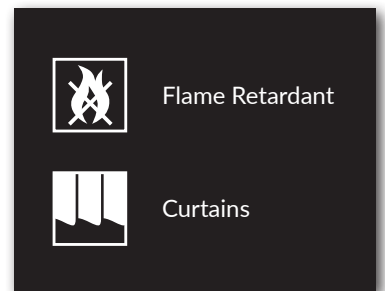

*Metallised curtain fabric for superior heat and light control*

### Features

- Part of the Verosol SilverScreen Living Collection - Metallised fabric developed in Europe, to the highest quality standard
- Provides excellent view through and superior heat and glare control independent of colour
- Woven from 100% Polyester Trevira CS and is inherently flame retardant, making it ideal for both residential and commercial applications
- Greenguard Gold and Oeko-Tex certified
- Available in Transparent and semi transparent in a selection of 11 core colours

### Care Instructions



For more more information visit [verosol.com.au](http://verosol.com.au) or call **1800 721 404**



# 882 SilverScreen Originals

## Semi Transparent Metallised Curtain Fabric

Fabric Density	Semi Transparent			Anti-Static	Yes	
Composition	100% Polyester   Trevira CS	PVC free	Formaldehyde free	Halogen free	Halogen free	Antimicrobials free
Weight	205gsm ± 5%					
Thickness	0.48mm ± 5%					
Width	2400mm ± 50mm					
Colour Fastness	< 5 [ISO 105-B02] Metal 8					
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0 Range [0-20]				
	Spread of flame Index	0 Range [0-10]				
	Heat evolved Index	0 Range [0-10]				
	Smoke developed Index	2 Range [0-10]				
[AS/NZS 3837-1998]	Classification Group 1					
[International]	DIN 4102 B1 (D)   BS5867-2 (UK)   NFPA 701 (USA)					
Aluminium Adhesion	ISO 2409 Classification 0					
Certification	Greenguard Gold	Oeko-Tex 100 Class IV	ISO 9001:2015	ISO 14001:2015		
	REACH	RoHS2				
Suitable Products	Curtains					

<b>Fabric colour code</b>	<b>0000</b>
Solar transmittance	10%
Solar reflectance outside	46%
Solar absorptance	44%
Luminous transmittance [VLT]	10%
UV transmittance	9%
Openness factor (nominal)	6%
Ra (colour rendering index)	99

### Glazing Type - Single 4mm Clear Glass

Visible light transmittance	10%
G-value / Solar heat gain coefficient	37%
Shading coefficient	43%
U-value (W/m²K)	2.4

### Glazing Type - High Performance Glazing

Visible light transmittance	7%
G-value / Solar heat gain coefficient	22%
Shading coefficient	25%
U-value (W/m²K)	0.9

### Core Colour Range

