
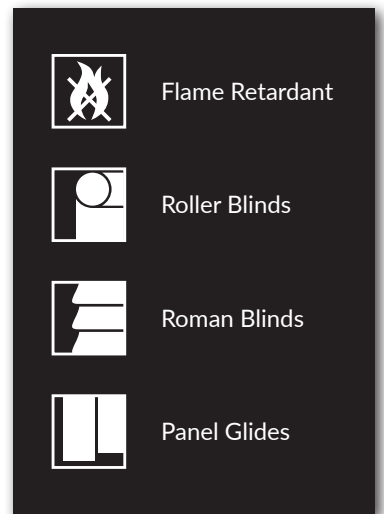


## 231 Veroscreen G3

Semi Transparent

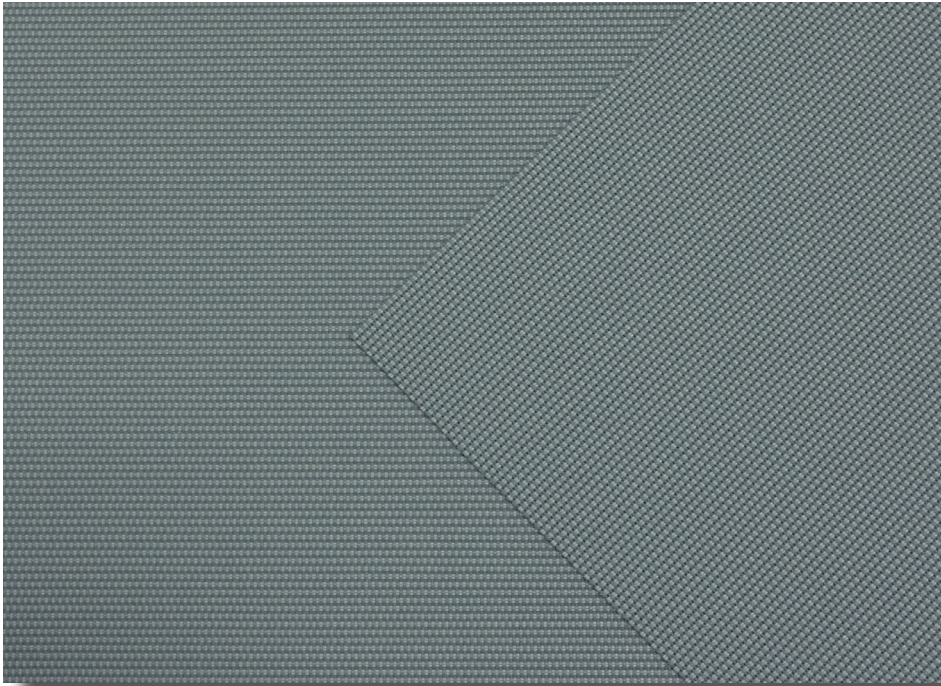

*Delicate to touch and offering subtle privacy with matching blackout*

### Features

- A premium fade resistant and flame retardant fabric
- Constructed from a fine 2x1 weave, making it delicate to touch
- Offering a clean view from the inside of the home and subtle privacy from the outside
- Durable, easy to clean screen fabric, making it ideal for kitchens and bathrooms
- Contemporary palette of 16 colours, and available in matching blackout fabric
- Suitable for Roller Blinds, Roman Blinds and Panel Glides

### Care Instructions

Wipe clean with warm soapy water and a damp cloth.

For more information or to create your next specification visit [verosol specifications.com.au](https://verosol specifications.com.au) or call **1800 721 404**



# 231 Veroscreen G3

## Semi Transparent

Fabric Density	Semi Transparent		
Composition	30% Polyester / 70% PVC		Dimensional Stability
Weight	425gsm ± 5%		Warp 153 daN / 5cm
Thickness	0.63mm ± 5%		Weft 184 daN / 5cm
Width	3000mm	Breaking Strength	Warp 5.2 daN
			Weft 4.9 daN
Colour Fastness	≥ 5 [Blue Wool Scale]		
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	15	Range [0-20]
	Spread of flame Index	0	Range [0-10]
	Heat evolved Index	1	Range [0-10]
	Smoke developed Index	7	Range [0-10]
Certification	Greenguard Gold	Oeko-Tex 100 Class IV	
Suitable Products	Roller Blinds	Roman Blinds	Panel Glides

Fabric colour code	1000	1500	1800	2000	3000	4000	5000	5500	5800	6000	6500	6700	7000	8000	8500	9000
Solar transmittance	24%	21%	22%	22%	21%	15%	10%	8%	10%	15%	14%	12%	7%	9%	10%	7%
Solar reflectance outside	62%	57%	59%	54%	43%	30%	12%	5%	13%	49%	37%	23%	11%	8%	6%	4%
Solar absorbance	14%	22%	19%	24%	36%	55%	78%	87%	77%	36%	49%	65%	82%	83%	84%	89%
Luminous transmittance	20%	16%	18%	17%	15%	11%	9%	8%	8%	11%	11%	8%	7%	8%	9%	7%
UV transmittance	7%	7%	7%	7%	7%	7%	8%	7%	7%	5%	7%	7%	6%	8%	8%	7%
Openness factor	7%	6%	7%	7%	6%	6%	8%	7%	6%	5%	7%	6%	6%	8%	8%	7%

### Glazing Type - Single 4mm Clear Glass

G-value / SHGC	38%	41%	40%	43%	49%	56%	66%	69%	65%	45%	52%	59%	66%	68%	69%	70%
Shading coefficient	44%	47%	46%	49%	56%	64%	76%	79%	75%	52%	60%	68%	76%	78%	79%	80%

### Glazing Type - High Performance Glazing

G-value / SHGC	25%	26%	26%	26%	27%	28%	30%	31%	30%	27%	28%	29%	30%	30%	30%	31%
Shading coefficient	29%	30%	30%	30%	31%	32%	34%	36%	34%	31%	32%	33%	34%	34%	34%	36%

### Colour Range

