


286 Soltis 96

Semi Transparent



Flame Retardant

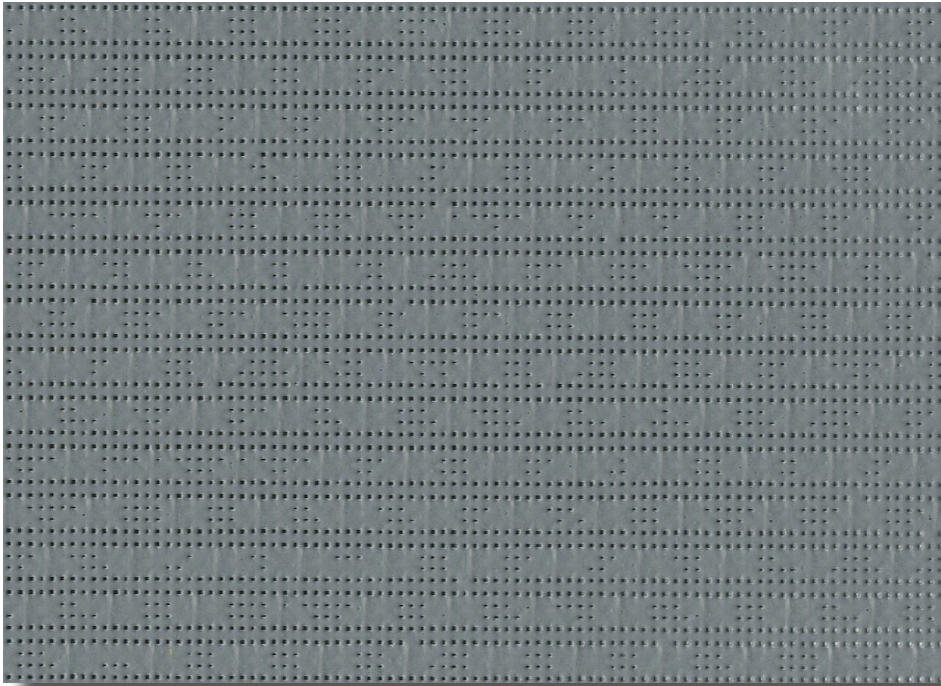

External Roller Blinds

A micro-perforated fabric, ideal for creating cosy atmospheres in outdoor areas

Features

- Micro-perforated fabric that allows air to circulate
- Reduces glare allowing outward visibility and provides UV protection
- The fabric's open nature allows natural light into your home
- The fabric's unique design and its enduring plain colours provide modern styling to your outdoor living areas
- Soltis 96 smooth fabric surface resists dirt, mould and facilitates cleaning

Care Instructions

Keep the fabric clean by brushing regularly both on the top & underside with a soft brush. Rinse with clean water or wipe with a wet sponge. Allow the fabric to dry completely before it is rolled up. Do not use powered, high pressure washes or steam to clean fabric. Do not apply soaps, abrasive powders, detergents, cleaning fluids or insecticides.

For more information or to create your next specification visit verosol specifications.com.au or call **1800 721 404**



286 Soltis 96

Semi Transparent

Fabric Density	Semi Transparent		
Composition	40% Polyester / 60% Vinyl	Tensile Strength [EN ISO 1421]	Warp: 220 daN / 50mm
Weight	400gsm ± 5%		Weft: 220 daN / 50mm
Thickness	0.45mm ± 5%	Tear Strength [DIN 53.363]	Warp: 30 daN
Width	2670mm		Weft: 25 daN
Construction	PVC coated polyester - Preconstraint® Technology		
Flame Retardancy tested to [AS/NZS 1530.3-1999]	Ignitability Index	16 Range [0-20]	Complies with BCA General requirements
	Spread of flame Index	0 Range [0-20]	
	Heat evolved Index	1 Range [0-20]	
	Smoke developed Index	6 Range [0-20]	
[International]	M2		
Certification	Greenguard Gold	ISO 9001	
Suitable Products	External Roller Blinds		

Fabric colour code	8102	8861	2135	50850	2043	50272	2171	50844	2047	8450
Solar transmittance	21%	17%	16%	8%	5%	12%	11%	7%	5%	4%
Solar reflectance outside	70%	60%	55%	302	11%	53%	49%	24%	8%	7%
Solar absorbance	9%	23%	29%	62%	84%	35%	40%	69%	87%	89%
Luminous transmittance [VLT]	19%	11%	7%	6%	5%	9%	5%	5%	4%	4%
Openness factor	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%

Colour Range

