
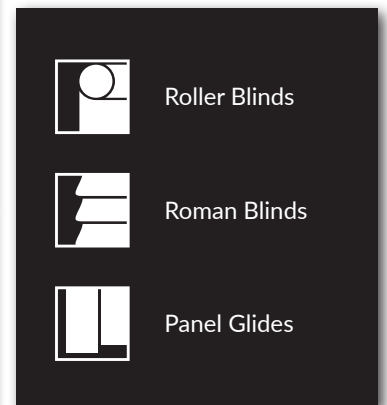


753 Manhattan

Blockout

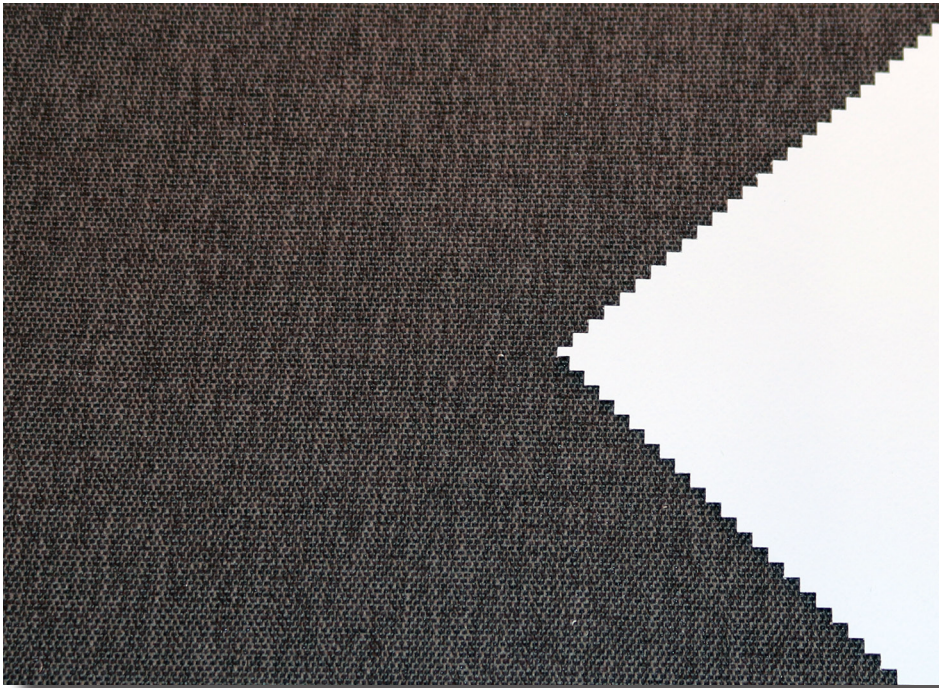

Features

- Intricate weave construction with multi-coloured yarns, creating depth and texture
- Combination of thick and thin yarns adds a decorative touch
- Designed for maximum room darkening and total privacy
- Featuring a neutral palette of 7 colours, and available in matching non transparent fabric
- Suitable for Roller Blinds, Roman Blinds and Panel Glides

Care Instructions

Surface dust can be removed with vacuum or a soft cloth

For more information or to create your next specification visit verosol specifications.com.au or call **1800 721 404**



Green Building
Council Australia
Member 2023-2024

753 Manhattan

Blockout

Fabric Density	Blockout		
Composition	100% Polyester with foamed acrylic coating PVC free		
Weight	420gsm ± 10%		
Thickness	0.72mm ± 5%		
Width	3000mm		
Colour Fastness [ISO 105-B02:2014]	≥ 5 [Blue Wool Scale], Fade Resistant		
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	15	Range [0-20]
	Spread of flame Index	8	Range [0-10]
Compliant with BCA requirements for class 2 to 9 buildings	Heat evolved Index	5	Range [0-10]
	Smoke developed Index	7	Range [0-10]
Certification	Greenguard Gold	Oeko-tex 100 Class IV	
Suitable Products	Roller Blinds	Roman Blinds	Panel Glides


Blockout Fabric Range

Solar transmittance	0%
Solar reflectance outside	70%
Solar absorptance	30%
Luminous transmittance [VLT]	0%
UV transmittance	0%
Openness Factor [nominal]	0%

Glazing Type - Single 4mm Clear Glass

G-value / Solar heat gain coefficient	30%
Shading coefficient	34%

Colour Range

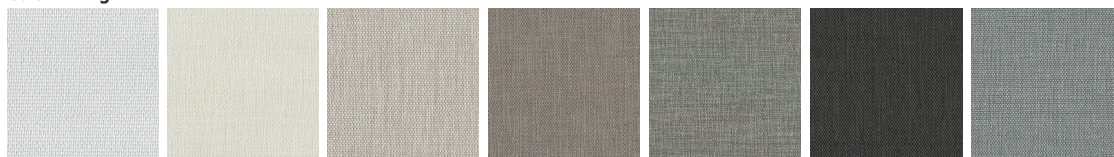

1000 Grand Central

2000 Central Park

3000 Empire State

4000 Time Square

5000 5th Avenue

6000 Liberty

7000 Wall Street