Verosol

Ambience Twin Multi-Link Roller Blind

Product Information

Ambience Twin Multi-Link Roller Blind is an elegant and practical solution for day and night use. Used to operate multiple blinds for larger window spans with a single chain, eliminating unsightly cords. Resulting in better light control, greater privacy, uninterrupted views, and indoor/ outdoor accessibility.

Suitable for both Commercial and Residential use.

The system can utilise a combination of any of the Verosol Roller Fabrics – select a blockout fabric for total privacy or a transparent or semi-transparent fabric to provide vision through.

Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit www.verosol.com.au



Technical Information

Product Code	R203.0			
Product Name	Ambience Twin Multi-Link Roller Blind			
Operation	Stainless Steel Chain Operation			
Dimensions	Width	300mm minimum - 3000mm maximum		
	Drop	300mm minimum - 3000mm maximum		
	Spring Assist	850mm minimum width		
	Maximum Area	15m ² over 3 sections		
Roller Tube	Light	43mm - optimised for fabric weight and width of blind to reduce tube deflection		
	Standard	44mm - optimised for fabric weight and width of blind to reduce tube deflection		
	Heavy Duty	49mm - optimised for fabric weight and width of blind to reduce tube deflection		
Base Rail Options	Flat [11mm x 22mm], Round [22mm], Verosol [17mm x 28mm] or Elliptical [11mm x 22mm]			
	Colours	Paint: White, Black and Sandstone Anodised: Clear		
Control	Mechanism	Direct action, high tensol would steel spring which operated in such a way that it only applies the precise braking power necessary to keep the blind in the desired position.		
	Idler	Extendable pin idle-end for easy installation. The idle-end extends up to 10mm in increments of 1mm for improved installation.		
	Colours	Paint: White, Black, Sandstone and Silver Grey		
	Chain	PVC, Nickel Plated Steel or Stainless Steel		
Brackets	Slim Combo BB	Both fabrics are back rolled [controls on same side]		
	Slim Combo FB	Top fabric is front rolled and bottom fabric is back rolled [controls on same side]		
	Slimline Combo	Top fabric is front rolled and bottom fabric is back rolled [controls on opposite sides]		
	Square Combo	Top fabric is front rolled and bottom fabric can be either front or back rolled [controls on same side]		
	Colours	White, Black, Sandstone and Silver Grey		


Ambience Twin Multi-Link Roller Blind

Motorisation

Product Code	R203.6		R203.1	R303.4 R303.5	
Product Name	Ambience Twin Multi-Link Roller Blind		Ambience Wirefree Twin Multi-Link	Ambience Wirefree Twin Multi-Link	
Operation	240V AC Motorised		15V 12V Wirefree	12V Wirefree Sonesse 30 RTS 12V Wirefree Sonesse 40 RTS	
	Motor Types: LS40 RTS40 LS40 Sonesse RTS40 Sonesse Automate ML Automate EL			Sonesse 30 RTS Sonesse 40 RTS825mm min 890mm min	
Dimensions	Width	700mm min - 3000mm max Max Width: 3000mm	Min Width: 2Nm: 740mm 3Nm: 950mm Max Width: 3000mm	825mm min - 3000mm max Max Width: 3000mm	
	Drop	300mm min - 3000mm max	300mm min - 3000mm max	300mm min - 3000mm max	
	Maximum Area	24m ² over 3 sections	Maximum Area: 2.0Nm: 8kg 30Nm: 12kg	18m ² over 3 sections	
Roller Tube	Light	43mm - optimised for fabric weight and width of blind to reduce tube deflection			
	Standard	44mm - optimised for fabric weight and width of blind to reduce tube deflection			
	Heavy Duty	49mm - optimised for fabric weight and width of blind to reduce tube deflection			


System Diagrams

Ambience Twin Multi-Link Roller Blind

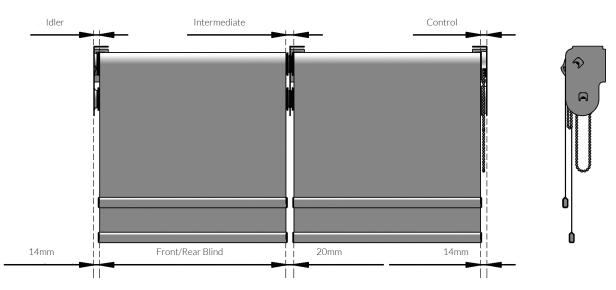

Note: Square Combo brackets are symmetrical. Light gaps on both sides are 14mm as illustrateed abvove [chain op]

Note: Light Gaps will vary by: Bracket type, Chain or Motor operation, and Type of motor selectted. Visit verosol.com.au or call 1800 721 404 for more information.

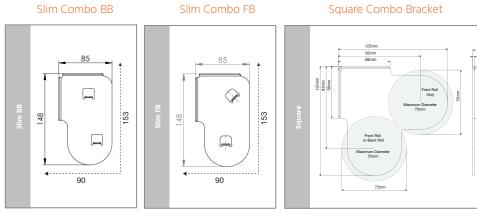

Max. roll diameter: 68mm

Max. roll diameter: 68mm

Max. roll diameter: 72mm

© Copyright 2014 Verosol Australia [ABN 36 006 221 003]

All specifications and other data are based on information available at the time of publication of this document. Information is subject to product tolerances and/or change without prior notice.