


## 329 KORE

Semi Transparent



Flame Retardant

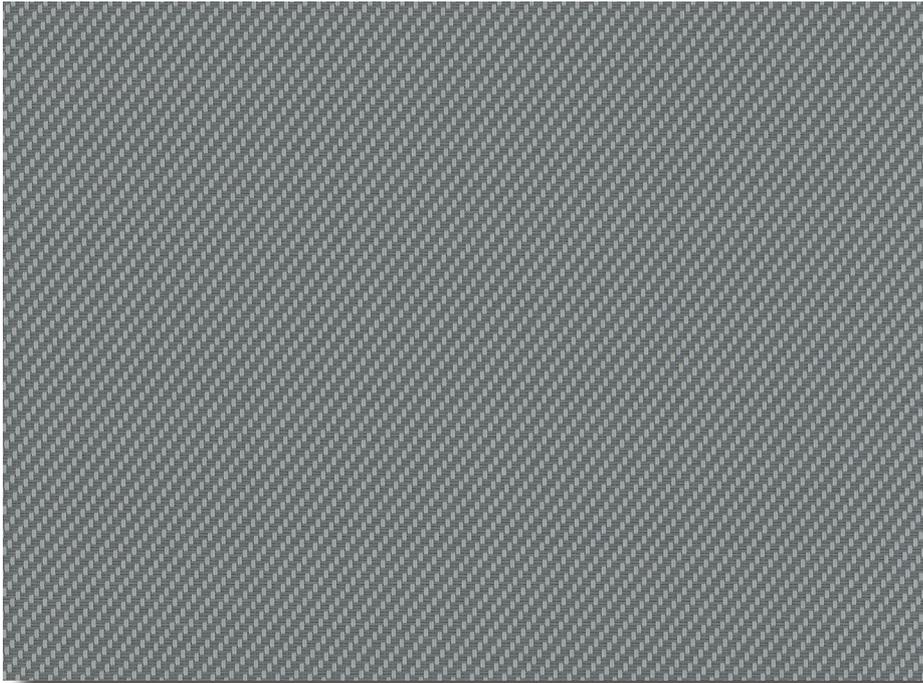

External Roller Blinds

*Inherently flame retardant twill weave fabric with exceptional performance & stability*

### Features

- KORE enables you to make the most of natural light while also benefiting from optimal thermal characteristics
- Reduces glare providing great visual comfort with great outward visibility
- Filters up to 95% of UV radiation
- Perfect integration into ZIP systems providing modern styling to your outdoor living areas

### Care Instructions

Keep the fabric clean by brushing regularly both on the top & underside with a soft brush. Rinse with clean water or wipe with a wet sponge. Allow the fabric to dry completely before it is rolled up. Do not use powered, high pressure washes or steam to the clean fabric. Do not apply soaps, abrasive powders, detergents, cleaning fluids or insecticides.

For more information visit [verosol.com.au](https://verosol.com.au) or call **1800 721 404**



# 329 KORE

## Semi Transparent

Fabric Density	Semi Transparent		
Composition	42% Glass Fiber / 58% PVC		Tensile Strength [EN ISO 1421]
Weight	515gsm ± 5%		Warp: 300 daN / 50mm Weft: 250 daN / 50mm
Thickness	0.73mm ± 10%		Tear Strength [DIN 53.363]
Width	3200mm		Warp: 23 daN Weft: 19 daN
Construction	Glass Fiber Core, PVC Coated, Twill Weave		
Colourfastness	7/8 Blue Scale [ISO 105 B02]		
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0 Range [0-20]	
	Spread of flame Index	0 Range [0-10]	
	Heat evolved Index	0 Range [0-10]	
	Smoke developed Index	5 Range [0-10]	
[AS/NZS 3837-1998]	Classification Group 2		
[International]	M1/NFP 92-507   B1/DIN 4102.1   C-s3,d0 / EN 13501-1		
Certification	Greenguard Gold	ISO 9001	
Suitable Products	External Roller Blinds		

Fabric colour code	2101 Front-A	2101 Rear-B	2102 Front-A	2102 Rear-B	2103 Front-A	2103 Rear-B	2104 Front-A	2104 Rear-B	2105 Front-A	2105 Rear-B	2108 Front-A	2108 Rear-B	2106 Front-A	2106 Rear-B	2107 Front-A	2107 Rear-B
Solar transmittance	25%	25%	19%	19%	16%	16%	11%	11%	7%	7%	6%	6%	6%	6%	6%	6%
Solar reflectance outside	63%	63%	48%	53%	38%	38%	24%	24%	16%	16%	9%	12%	13%	10%	6%	6%
Solar absorptance	12%	12%	33%	28%	46%	46%	65%	65%	77%	77%	85%	82%	81%	84%	88%	88%
Luminous transmittance [VLT]	24.7%	24.7%	16.7%	16.7%	13.3%	13.3%	9.6%	9.6%	6.3%	6.3%	5.9%	5.9%	6.4%	6.4%	6.3%	6.3%
Openness factor	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
[EN 13363-2*] G-Value [gtot] Glazing Types: C and D																
G-Value [External gtot] Type-C	0.18	0.18	0.14	0.13	0.12	0.12	0.09	0.09	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.07
G-Value [External gtot] Type-D	0.10	0.10	0.07	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.04

### EN 13363-2\*


Takes into account the spectral values of glazing transmission and reflection + blind combination for calculating the solar factor gtot.

Type "C" glazing: Low emission, insulating double glazing - face 3 (4 + 16 + 4; argon-filled) g = 0.59 - U = 1.2

Type "D" glazing: Low emission, insulating double glazing - face 2 (4 + 16 + 4; argon-filled) g = 0.32 - U = 1.1

### Colour Range

View from Inside - Front [Side A]

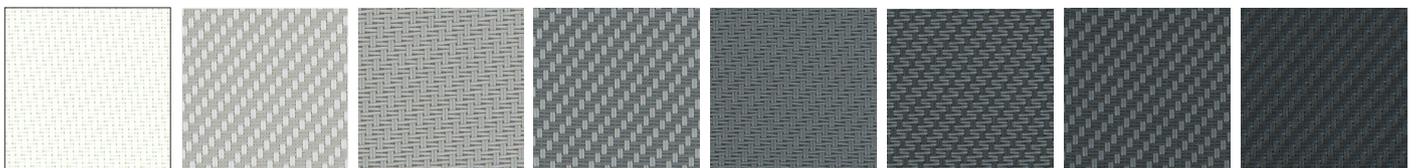

2101 - White

2102 Aluminium

2103 Silver

2104 Iron

2105 Grey


2108 Gunmetal

2106 Charcoal Grey

2107 Ink

### Colour Range

View from Outside - Rear [Side B]

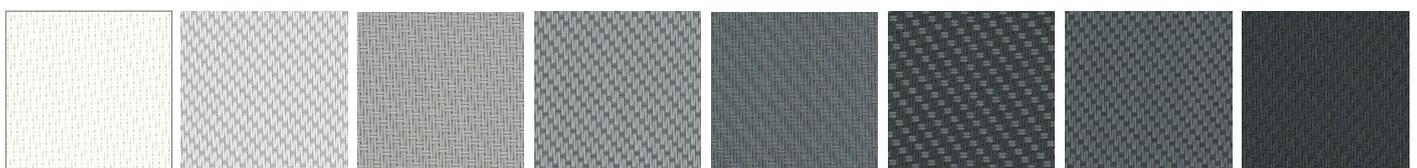

2101 - White

2102 Aluminium

2103 Silver

2104 Iron

2105 Grey

2108 Gunmetal

2106 Charcoal Grey

2107 Ink